


Product Data
HYDROCAL®
White Gypsum Cement

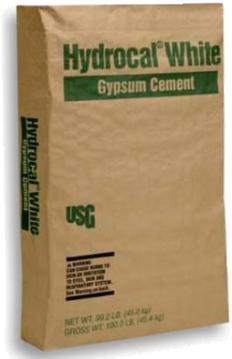

- Setting expansion twice that of Moulding Plaster or Pottery Plaster.
- High green strength for less breakage in process.
- Ideal for both solid and hollow casting of lamp bases and figurines.
- Good multi-purpose product.
- Very white color.


Technical Properties	English	Metric
Use Consistency (parts of water by weight per 100 parts plaster)	45	45
1 Hr. Compressive Strength	1,000 psi	6.9 MN/m ²
Dry Compressive Strength	5,000 psi	34.5 MN/m ²
Maximum Setting Expansion	0.390%	0.390%
Density Wet	110.0 lb./ft. ³	1.76 g/cm ³
Dry	90.0 lb./ft. ³	1.44 g/cm ³
Set Time (Machine Mix) *	25-35 min.	25-35 min.

*Other set times may also be available. Call your sales representative for more information. Hand mix times will be longer.

General Directions and Guidelines

Preparing the Mix

Use potable water at temperatures between 70 and 100 °F (21 and 38 °C). Since variations in slurry (HYDROCAL® Brand White Gypsum Cement and water mixture) temperature produce variations in setting time, it is important to keep both HYDROCAL Brand Gypsum Cement and water in a stable temperature environment prior to use. The higher the temperature of the slurry, the shorter the set time. See the graph below.

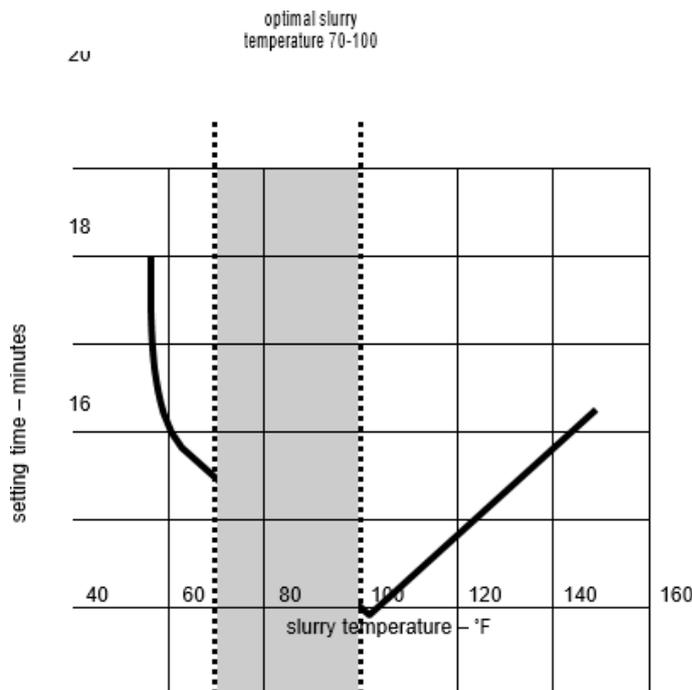

Measuring

Weigh both HYDROCAL Brand White Gypsum Cement and water at the recommended use consistency for each mix (see technical properties above). The water-to-HYDROCAL Brand White Gypsum Cement ratio is critical because it governs all physical properties of the final cast piece.



Soaking

Sift or strew HYDROCAL Brand White Gypsum Cement into water slowly and evenly. Do not drop handfuls of HYDROCAL Brand White Gypsum Cement directly into the water. Allow soaking for 1-2 minutes. HYDROCAL Brand White Gypsum Cement should be fully dispersed in the water prior to mixing. Small batches require less soaking than large batches. See bulletin IG503 for specific soaking instructions.

Mixing

Mixing the HYDROCAL Brand White Gypsum Cement slurry is one of the most important steps in producing HYDROCAL Brand White Gypsum Cement casts with maximum strength, hardness, and other important properties. Mechanically mixed slurries develop uniform casts with optimal strengths. HYDROCAL Brand White Gypsum Cement can be mechanically mixed through both batch and continuous processes. Proper blade and bucket dimensions are important for obtaining the best batch mix (see IG503 for details).

Longer mixing times result in higher cast strength and shorter setting times. The relationship between mixing time and both compressive strength and setting time is shown below.

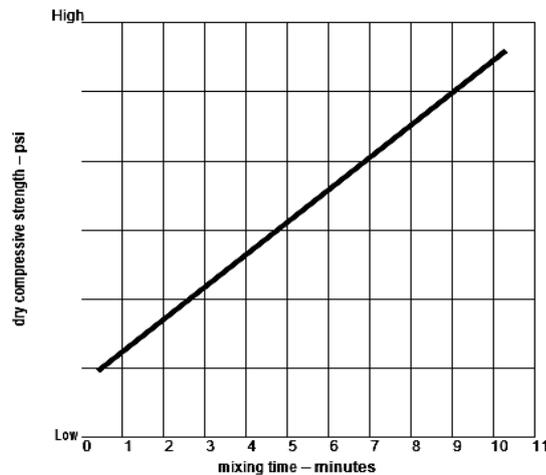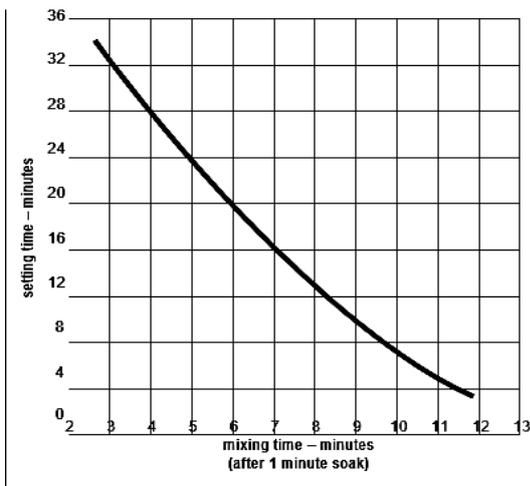

Pouring

To prevent air entrainment and provide a uniform, smooth surface, careful pouring of the slurry is necessary. Agitation of the filled mold is a further step used to prevent air at or near the surface of the cast piece. Whenever possible, the slurry should be poured carefully in the deepest area so the slurry flows evenly across the surface of the mold. Pouring a large amount of slurry directly on the face of the mold may result in slight densification of the cast at the point where the slurry strikes the surface of the mold.


Drying

All casts should be dried as quickly as is safely possible after manufacture so that maximum physical properties can develop. Dry to a constant weight. The best drying rooms or ovens provide

- (1) uniform and rapid circulation (minimum of 15-30 fps) of air with no "dead spots" having little or no air movement,

(2) equal temperatures throughout the entire area, and (3) provisions for exhausting a portion of the air while replacing it with fresh air. High humidity surrounding the drying room or oven inhibits the efficiency of the drying because the air pulled into the room is incapable of picking up much moisture from the cast pieces.

The maximum temperature at which HYDROCAL Brand White Gypsum Cement casts are safe from calcination is 120 °F (49°C). With substantial free water in the cast piece, higher drying temperatures can be used without difficulty. As drying progresses, the temperature must be reduced to prevent calcination. The safe drying zone is in the shaded area of graph (below, right). Before removing casts from the dryer, the temperature should approach that of the area around the dryer to prevent thermal shock. See IG502 for more details on proper drying.

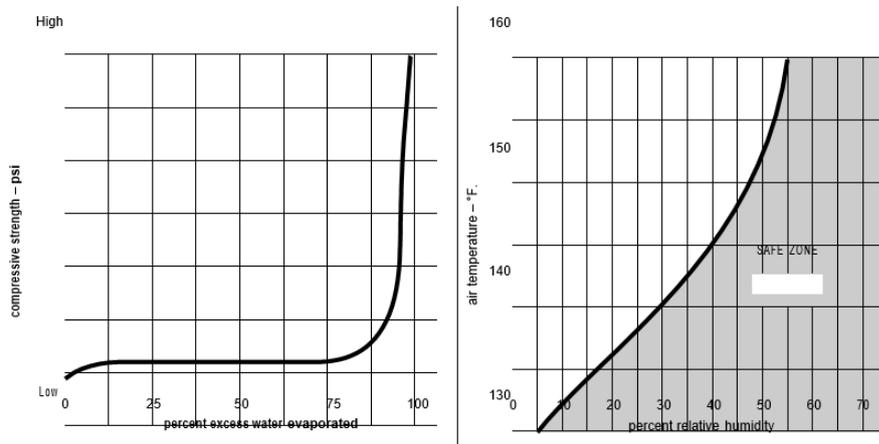

Keep in a dry, stable environment indoors. Do not stack more than 2 pallets high. Keep from drafts. Rotate stock.

Warning

When mixed with water this material hardens and becomes very hot- sometimes quickly. DO NOT attempt to make a cast enclosing any part of the body using this material. Failure to follow these instructions can cause severe burns that may require surgical removal of affected tissue amputation of limb. Dust can cause eye, skin, nose, throat, or respiratory irritation. Avoid eye contact and inhalation of dust. Wear eye protection. If eye contact occurs, flush thoroughly with water. If dusty, wear a NIOSH/MSHA-approved respirator. Use proper ventilation to reduce dust exposure. Do not ingest. If ingested call physician. Product safety information: USA (800) 507-8899.

Trademarks

The following trademarks used herein are owned by United States Gypsum or a related company: Hydrocal, USG.

Notice

We shall not be liable for incidental or consequential damages, directly or indirectly sustained, nor for any loss caused or by application of these goods not in accordance with current printed instruction or for other than the intended use.

Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within (30) days from the date it was or reasonably should have been discovered.

KEEP OUT OF REACH OF CHILDREN

Industrial Gypsum Division
125 South Franklin Street
Chicago, IL 60606-4678
A Subsidiary of USG Corporation
©1999, United States Gypsum Company

800 487.4431
312.606.5380 www.usg.com/ig
E-mail: industrialgypsum@usg.com

IG1381/5-99 Printed in U.S.A.